



BUILDING THE FUTURE



KS800



KS400



TECHNICAL SPECIFICATIONS

Input Voltage
 Mains Voltage Tolerance
 Minimum Welding Current
 Maximum Welding Current
 TIG Duty Cycle, 40°C
 MMA Duty Cycle, 40°C
 Open – Circuit Voltage
 Weight
 Standard Accessories

 Dimensions (W, L, H)
 Certification

400 V
 - 10 % / + 15 %
 10 A
 800 A
 800 A %40, 600 A %100
 800 A %40, 600 A %100
 63 V - 82 V
 75 kg
 5m Power Cable (4x6mm²)
 5m Electrode Clamp (50mm²)
 3m Earth Clamp (95mm²)
 393mm x 580mm x 575mm
 CE

400 V
 - 10 % / + 15 %
 10 A
 400 A
 400 A %60, 230 A %100
 400 A %60, 190 A %100
 58 V - 75 V
 18 kg
 5m Power Cable (4x4.5mm²)
 5m Electrode Clamp (35mm²)
 3m Earth Clamp (35mm²)
 216mm x 350mm x 415mm
 CE

KS270



400 V
- 10 % / + 15 %
10 A
270 A
270 A %35, 200 A %60, 150 A %100
270 A %25, 170 A %60, 130 A %100
58 V - 75 V
12 kg
5m Power Cable (4x2.5mm²)
5m Electrode Clamp (35mm²)
3m Earth Clamp (35mm²)
216mm x 350mm x 415mm
CE

KS220




230 V
- 10 % / + 15 %
10 A
220 A
220 A %35, 160 A %60, 120 A %100
220 A %25, 140 A %60, 100 A %100
58 V - 75 V
12 kg
2m Power Cable (4x2.5mm²)
5m Electrode Clamp (35mm²)
3m Earth Clamp (35mm²)
216mm x 350mm x 415mm
CE

KS200




230 V
- 10 % / + 15 %
10 A
200 A
200 A %20, 130 A %60, 100 A %100
200 A %35, 110 A %60, 90 A %100
58 V - 75 V
4 kg
2m Power Cable (3x2.5mm²)
3m Electrode Clamp (16mm²)
2m Earth Clamp (16mm²)
216mm x 107mm x 233mm
CE



Arc Force



Hot Start





Lift TIG

IP23

Modüler Tasarım

KOLARC

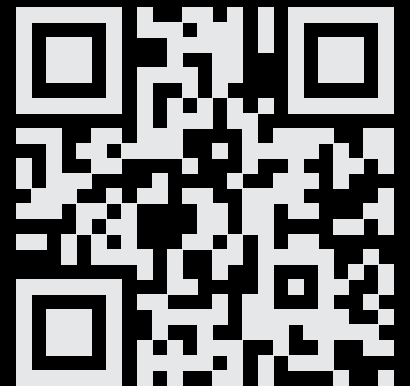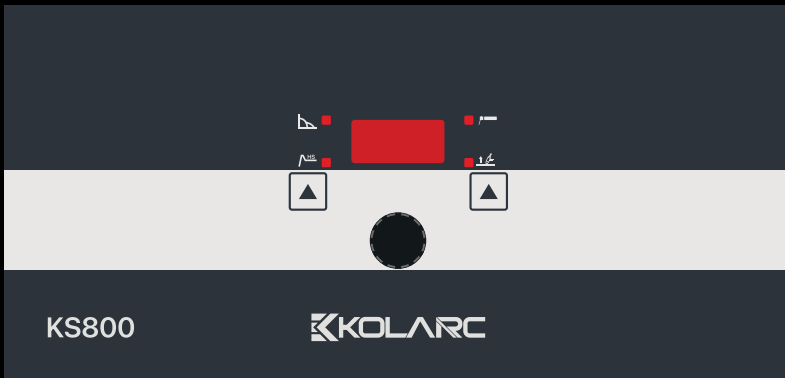

www.kolarc.com