

KOLARC

BUILDING THE FUTURE



TX270W

Pulse

Technical Specifications	
Input Voltage	400 V (- 10 % / + 15 %)
Welding Current	10 A - 270 A
Duty Cyle, 40°C	TIG 270A 45% , MMA 270A 45%
	TIG 220A 60% , MMA 220A 60%
	TIG 180A 100% , MMA 180A 100%
Open - Circuit Voltage	58 V - 75 V
Weight	65 kg
Dimension (W,L,H)	532mm x 987mm x 1040mm
Certification	CE
Stok Code	M 1181 00001
Product Components	
Power Source, TX270 W Pulse (Cable, 4x4mm², 5m)	
Cooling Unit, WX	
Trolley, TX	
Torch, TX18 (4m)	
Gas Regular (Mix)	
Gas Hose (1.5m)	
Ground Clamp (5m, 50mm²)	
Coolant (2.5L)	



Product Components



Power Source



Cooling Unit, WX



Gas Regulator



Military Connector



Trolley, TX




Ground Clamp



Torch, TX18 (4m)



Coolant (2.5L)

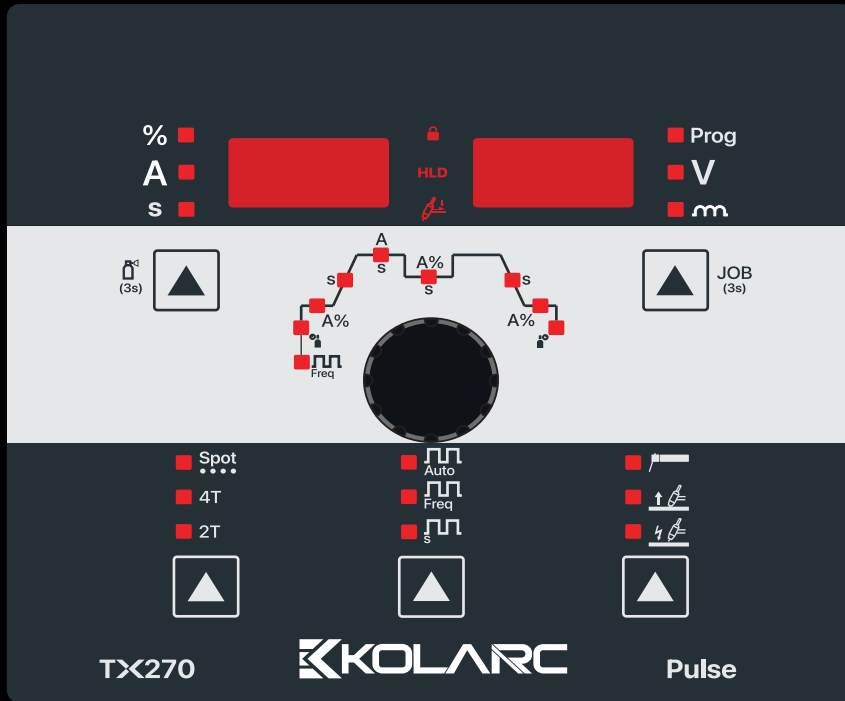

Intuitive User Interface

- HF
- Lift Tig
- 2T/4T
- Spot
- sPulse
- fPulse
- APulse
- Hot Start
- ArcForce
- Eernal Changable Couplings
- Modular IP21 Design
- Plug Double Setscrew
- Socket Brass-Nut
- Gas Filter

