

KOLARC

BUILDING THE FUTURE



XS400

Technical Specifications

Input Voltage	400 V (- 10 % / + 15 %)
Welding Current	10 A - 400 A
Duty Cyle, 40°C	TIG 400A 55% , MMA 400A 35%
	TIG 350A 60% , MMA 350A 60%
	TIG 300A 100% , MMA300A 100%
Open - Circuit Voltage	58 V - 75 V
Weight	25 kg
Dimension (W,L,H)	175mm x 310mm x 493mm
Certification	CE
Stok Code	M2260 00001

Product Components

Power Source, XS400 (Cable, 4x4mm², 5m)
Electrode Holder (5m, 50mm²)
Ground Clamp (5m, 50mm²)





Power Source




Ground Clamp




4x4 Rollers Wire Drive

- **Hot Start**
- **ArcForce**
- **CEL**
- **Antistick**
- **Lift Tig**
- **External Changable Couplings**
- **Modular IP23 Design**
- **Gas Filter**
- **Plug Double Setscrew**
- **Socket Brass-Nut**

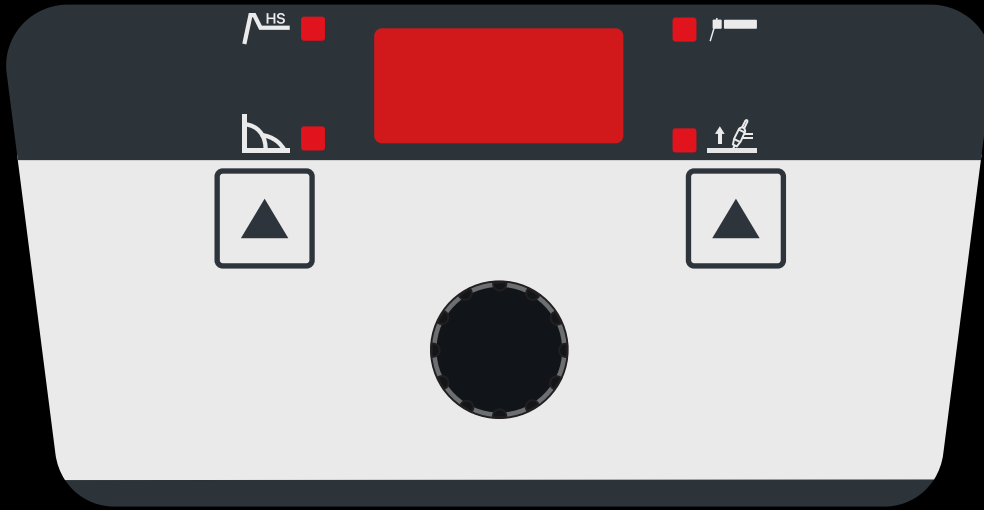

Intuitive User Interface

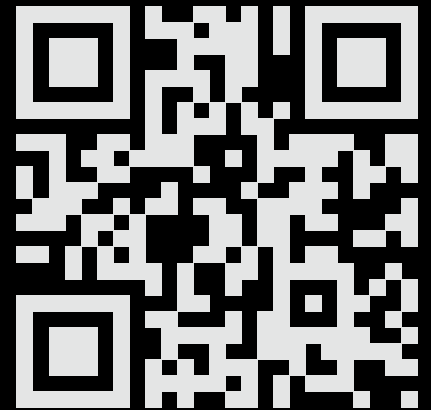

www.kolarc.com