

KOLARC

BUILDING THE FUTURE



XT270

Pulse

Technical Specifications

Input Voltage	400 V (- 10 % / + 15 %)
Welding Current	10 A - 270 A
Duty Cyle, 40°C	TIG 270A 45% , MMA 270A 45%
	TIG 250A 60% , MMA 250A 60%
	TIG 180A 100% , MMA180A 100%
Open - Circuit Voltage	58 V - 75 V
Weight	12 kg
Dimension (W,L,H)	175mm x 310mm x 493mm
Certification	CE
Stok Code	M2180 00001

Product Components

Power Source, XT270 W Pulse (Cable, 4x2mm², 5m)
Torch, XT27 (4m)
Gas Regulator (Mix)
Gas Hose (1.5m)
Ground Clamp (5m, 50mm²)





Power Source




Gas Regulator



Ground Clamp



Torch, XT27 (4m)

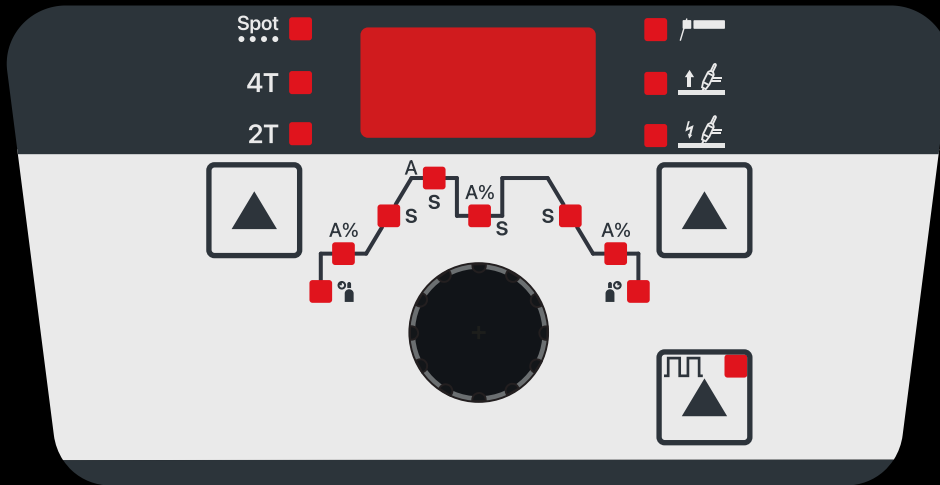

Intuitive User Interface

- **HF**
- **Lift Tig**
- **2T/4T**
- **Spot**
- **sPulse**
- **fPulse**
- **APulse**
- **CEL**
- **Hot Start**
- **ArcForce**
- **External Changable Couplings**
- **Modular IP23 Design**
- **Plug Double Setscrew**
- **Socket Brass-Nut**
- **Gas Filter**

