

KOLARC

BUILDING THE FUTURE



XT400 W

Pulse

Technical Specifications	
Input Voltage	400 V (- 10 % / + 15 %)
Welding Current	10 A - 400 A
Duty Cyle, 40°C	TIG 400A 45% , MMA 400A 45%
	TIG 350A 60% , MMA 350A 60%
	TIG 300A 100% , MMA 300A 100%
Open - Circuit Voltage	58 V - 75 V
Weight	94 kg
Dimension (W,L,H)	532mm x 860mm x 974mm
Certification	CE
Stok Code	M2201 00001
Product Components	
Power Source, XT400 W Pulse (Cable, 4x4mm ² , 5m)	
Cooling Unit, XW	
Trolley, XT	
Torch, XT19 (4m)	
Gas Regulator (Mix)	
Gas Hose (1.5m)	
Ground Clamp (5m, 50mm ²)	
Coolant (2.5L)	



Product Components



Power Source



Cooling Unit, XW



Gas Regulator



Trolley, XT




Ground Clamp



Torch, XT19 (4M)



Coolant (2.5L)

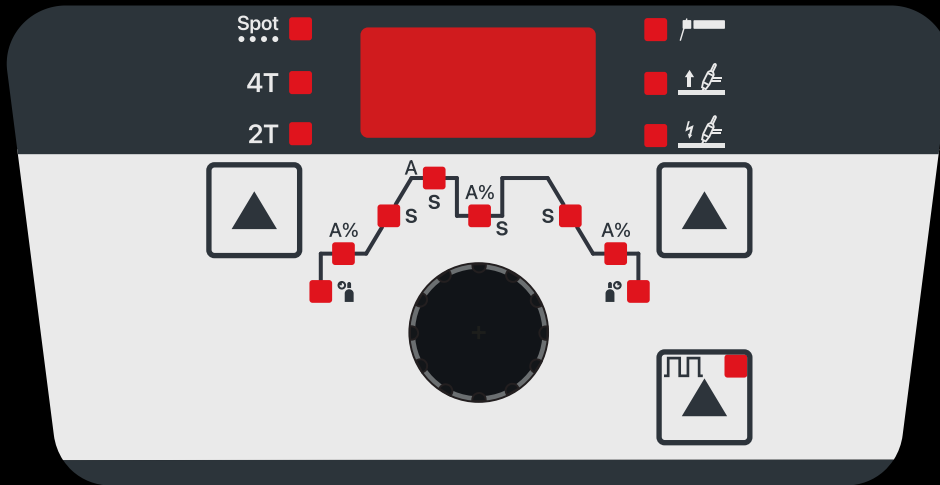

Intuitive User Interface

- **HF**
- **Lift Tig**
- **2T/4T**
- **Spot**
- **sPulse**
- **fPulse**
- **APulse**
- **CEL**
- **Hot Start**
- **ArcForce**
- **External Changable Couplings**
- **Modular IP23 Design**
- **Plug Double Setscrew**
- **Socket Brass-Nut**
- **Gas Filter**

