

KOLARC

BUILDING THE FUTURE



KT400 W



KT270 W



TECHNICAL SPECIFICATIONS

Input Voltage
Mains Voltage Tolerance
Minimum Welding Current
Maximum Welding Current
TIG Duty Cycle, 40°C
MMA Duty Cycle, 40°C
Open – Circuit Voltage
Weight
Standard Accessories

Dimensions (L, B, H)
Certification

400 V
- 10 % / + 15 %
10 A
400 A
400 A %40, 360 A %60, 320A %100
400 A %40, 360 A %60, 320A %100
58 V - 75 V
Liquid Cooled 65 kg
3 m Power Cable (4 x 4 mm²)
3 m Earth Clamp (50 mm²)
Gas Hose (1.5 m)
Torch, TX18 4m
532mm x 860mm x 974mm
CE

400 V
- 10 % / + 15 %
10 A
270 A
270 A %40, 230 A %60, 200 A %100
270 A %40, 230 A %60, 200 A %100
58 V - 75 V
Liquid Cooled 65 kg
4 m Power Cable (4 x 2.5 mm²)
3 m Earth Clamp (35 mm²)
Gas Hose (1.5 m)
Torch, TX18 4m
532mm x 860mm x 974mm
CE

KT220



230 V

- 10 % / + 15 %

10 A

220 A

220 A %35, 190 A %60 , 145 A %100

220 A %25, 140 A %60 , 105 A %100

58 V - 75 V

Air Cooled 12 kg

3m Power Cable (3 x 2.5 mm²)


3 m Earth Clamp (35 mm²)

Gas Hose (1.5 m)


Torch, TX26 4m

175mm x 310mm x 493mm


CE

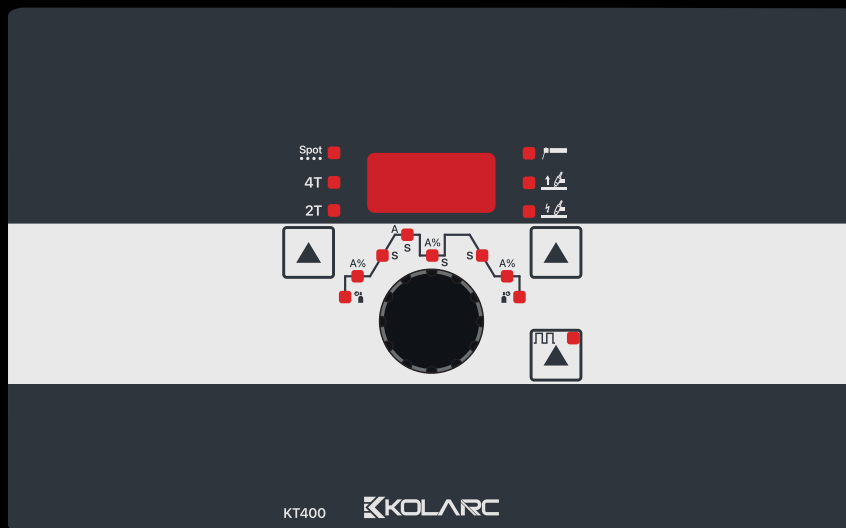


Intuitive User Interface



ArcForce

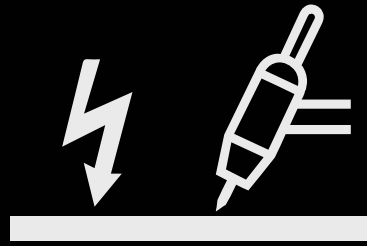

HF

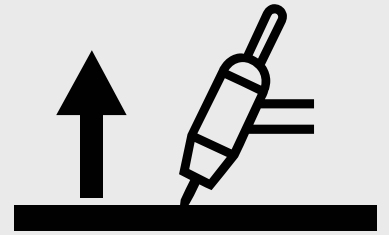

Lift TIG

4T / 2T

Spot
● ● ● ●



Hot Start



F
Pulse



S
Pulse

IP23

Modular Design