

# KOLARC

BUILDING THE FUTURE



Robotic Interfaces

Ethernet

Others



DeviceNet

EtherNet/IP

CANopen



EtherCAT



**XM350 W**  
Pulse



**XM350**  
Pulse



TECHNICAL SPECIFICATIONS

Input Voltage  
Mains Voltage Tolerance  
Minimum Welding Current  
Maximum Welding Current  
MIG Duty Cycle, 40°C  
TIG Duty Cycle, 40°C  
MMA Duty Cycle, 40°C  
Open – Circuit Voltage  
Factory Delivered Roller  
Weight  
Standard Accessories

Dimensions (W, L, H)  
Certification

400 V  
- 10 % / + 15 %  
10 A  
350 A  
350 A %60, 300 A %100  
350A %60, 300 A %100  
350 A %60, 300 A %100  
68 V - 82 V  
1.0 + 1.2 mm / Steel  
Liquid Cooled 94 kg  
5m Power Cable ( 4x4mm<sup>2</sup> )  
3m Earth Clamp ( 50mm<sup>2</sup> )  
Interconnection H.P ( 5m )  
Torch, MX50 4m  
532mm x 974mm x 1178mm  
CE


400 V  
- 10 % / + 15 %  
10 A  
350 A  
350 A %60, 300 A %100  
350 A %60, 300 A %100  
350 A %60, 300 A %100  
68 V - 82 V  
1.0 + 1.2 mm / Steel  
Air Cooled , 86 kg  
5m Power Cable ( 4x4mm<sup>2</sup> )  
3m Earth Clamp ( 50mm<sup>2</sup> )  
Interconnection H.P ( 5m )  
Torch, MX36 4m  
532mm x 974mm x 940mm  
CE

Whether Manual Or Robotic.

Experience 406\* welding programs



Pulse

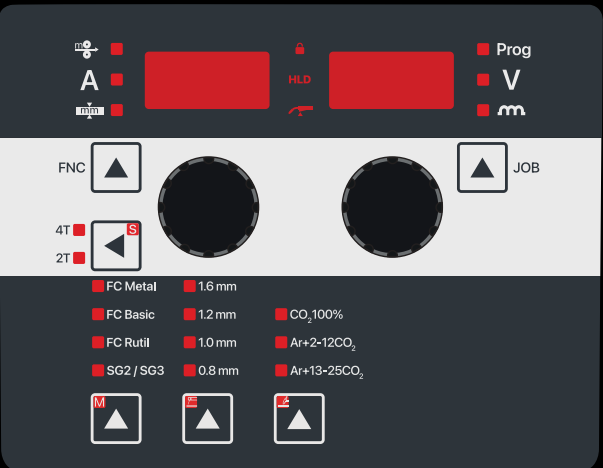


Synergic

Intuitive User Interface


| Standard-Pulse           |                            | 0.8                        | 1.0 | 1.2 | 1.6 |     |
|--------------------------|----------------------------|----------------------------|-----|-----|-----|-----|
| CrNi                     | SG2 / SG3<br>G3Si1 / G4Si1 | Ar+18%CO <sub>2</sub>      | 8   | 10  | 12  | 16  |
|                          |                            | Ar+10%CO <sub>2</sub>      | 18  | 20  | 22  | 26  |
|                          |                            | CO <sub>2</sub> 100%       | 28  | 30  | 32  | 36  |
|                          | 318 / 1.4576               |                            | 38  | 40  | 42  | 46  |
|                          | 316 / 1.4430               |                            | 68  | 70  | 72  | 76  |
|                          | 310 / 1.4842               |                            |     | 520 | 522 |     |
|                          | 309 / 1.4332               | Ar+2.5%CO <sub>2</sub>     | 538 | 540 | 542 | 546 |
|                          | 308 / 1.4316               |                            | 58  | 60  | 62  | 66  |
|                          | 307 / 1.4370               |                            | 48  | 50  | 52  | 56  |
|                          | Duplex 2209<br>1.4462      | Ar+20%He+2%CO <sub>2</sub> | 78  | 80  | 82  | 86  |
| CuSi                     |                            | Ar100%                     | 178 | 180 | 182 | 186 |
|                          |                            | Ar+2.5%CO <sub>2</sub>     | 558 | 560 | 562 | 566 |
| CuAl                     |                            | Ar100%                     | 188 | 190 | 192 | 196 |
|                          |                            | Ar100%                     | 198 | 200 | 202 | 206 |
| CuSi Brazing             |                            | Ar+2.5%CO <sub>2</sub>     | 208 | 210 | 212 | 216 |
|                          |                            | Ar100%                     | 218 | 220 | 222 | 226 |
| CuAl Brazing             |                            | Ar+2.5%CO <sub>2</sub>     | 228 | 230 | 232 | 236 |
|                          |                            | Ar100%                     | 118 | 120 | 122 | 126 |
| AlMg4,5 Mn               |                            | Ar+30%He                   | 128 | 130 | 132 | 136 |
|                          |                            | Ar100%                     | 530 | 532 | 536 |     |
| AlMg3                    |                            | Ar100%                     | 138 | 140 | 142 | 146 |
|                          |                            | Ar+30%He                   | 148 | 150 | 152 | 156 |
| AlSi                     |                            | Ar100%                     | 158 | 160 | 162 | 166 |
|                          |                            | Ar+30%He                   | 168 | 170 | 172 | 176 |
| Flux Cored Wire          |                            | 0.8                        | 1.0 | 1.2 | 1.6 |     |
| Steel / FluxCore Metal   |                            | Ar+18%CO <sub>2</sub>      | 238 | 240 | 242 | 246 |
|                          |                            | Ar+18%CO <sub>2</sub>      | 248 | 250 | 252 | 256 |
|                          |                            | CO <sub>2</sub> 100%       |     |     | 262 | 266 |
| Steel / FluxCore Basic   |                            | Ar+18%CO <sub>2</sub>      |     |     | 602 |     |
| CrNi / FluxCore Metal    |                            | Ar+2.5%CO <sub>2</sub>     |     |     | 272 | 276 |
| CrNi / FluxCore Rutil    |                            | Ar+18%CO <sub>2</sub>      |     |     | 282 | 286 |
| CrNi / FluxCore Rutil    |                            | CO <sub>2</sub> 100%       |     |     | 292 | 296 |
| Steel FluxCore High Str. |                            | Ar+18%CO <sub>2</sub>      |     |     | 592 |     |
| Steel / FluxCore Rutil   |                            | Self Shielded              |     |     | 720 | 722 |
| Application              |                            |                            |     |     |     |     |
| MIG/MAG Manual           |                            |                            |     |     | 4   |     |
| TIG (Lift Arc)           |                            |                            |     |     | 5   |     |
| MMA                      |                            |                            |     |     | 6   |     |
| Gouging                  |                            |                            |     |     | 7   |     |

| XDeep - Pulse           |                            |                            | 0.8                    | 1.0 | 1.2 | 1.6 |     |
|-------------------------|----------------------------|----------------------------|------------------------|-----|-----|-----|-----|
| CrNi                    | SG2 / SG3<br>G3Si1 / G4Si1 | Ar+18%CO <sub>2</sub>      | 298                    | 300 | 302 | 306 |     |
|                         |                            | Ar+10%CO <sub>2</sub>      | 308                    | 310 | 312 | 316 |     |
|                         | 318 / 1.4576               |                            |                        | 620 | 622 | 626 |     |
|                         | 316 / 1.4430               |                            |                        | 640 | 642 | 646 |     |
|                         | 310 / 1.4842               |                            |                        | 660 | 662 |     |     |
|                         | 309 / 1.4332               | Ar+2.5%CO <sub>2</sub>     |                        | 670 | 672 | 676 |     |
|                         | 308 / 1.4316               |                            |                        | 320 | 322 | 326 |     |
|                         | 307 / 1.4370               |                            |                        | 632 | 636 |     |     |
|                         | Duplex 2209 1.4462         |                            |                        | 650 | 652 | 656 |     |
|                         | AlMg4,5 Mn                 | Ar100%                     |                        |     | 332 | 336 |     |
| AlSi                    | Ar100%                     |                            |                        | 342 | 346 |     |     |
| Al99                    | Ar100%                     |                            |                        | 352 | 356 |     |     |
| CrNi / FluxCore Metal   | Ar+18%CO <sub>2</sub>      | 608                        | 610                    | 612 | 616 |     |     |
| XRoot - Pulse           |                            |                            | 0.8                    | 1.0 | 1.2 | 1.6 |     |
| CrNi                    | SG2 / SG3<br>G3Si1 / G4Si1 | Ar+18%CO <sub>2</sub>      |                        | 360 | 362 |     |     |
|                         |                            | CO <sub>2</sub> 100%       |                        | 370 | 372 |     |     |
|                         |                            | Ar+10%CO <sub>2</sub>      |                        | 500 | 502 |     |     |
|                         | XCold - Pulse              |                            |                        | 0.8 | 1.0 | 1.2 | 1.6 |
|                         | CrNi                       | SG2 / SG3<br>G3Si1 / G4Si1 | Ar+18%CO <sub>2</sub>  | 378 | 380 | 382 | 386 |
|                         |                            |                            | CO <sub>2</sub> 100%   | 388 | 390 | 392 |     |
|                         |                            |                            | Ar+10%CO <sub>2</sub>  |     | 510 | 512 |     |
|                         |                            | 318 / 1.4576               |                        |     | 678 | 680 | 682 |
|                         |                            | 316 / 1.4430               |                        |     | 698 | 700 | 702 |
|                         |                            | 308 / 1.4316               | Ar+2.5%CO <sub>2</sub> |     | 398 | 400 | 402 |
| 307 / 1.4370            |                            |                            |                        | 688 | 690 | 692 |     |
| Duplex 2209 1.4462      |                            |                            |                        | 708 | 710 | 712 |     |
| AlMg4,5 Mn              |                            | Ar100%                     |                        |     | 410 | 412 |     |
| AlSi                    |                            | Ar100%                     |                        |     | 420 | 422 |     |
| Al99                    | Ar100%                     |                            |                        | 430 | 432 |     |     |
| CuSi Brazing            | Ar100%                     | 438                        | 440                    | 442 |     |     |     |
| CuAl Brazing            | Ar100%                     | 448                        | 450                    | 452 |     |     |     |
| AlSi Brazing            | Ar100%                     |                            | 460                    | 462 |     |     |     |
| ZnAl Brazing            | Ar100%                     |                            | 470                    | 472 |     |     |     |
| ZnAl (St to Al Welding) | Ar100%                     |                            | 490                    | 492 |     |     |     |
| Mg / Mg                 | Ar+30%He                   |                            |                        | 572 | 576 |     |     |
| Cladding                |                            |                            | 0.8                    | 1.0 | 1.2 | 1.6 |     |
| NiCr-6625 / 2.4831      | Ar+30%He                   |                            | 100                    | 102 | 106 |     |     |
|                         | Ar+20%He+2%CO <sub>2</sub> |                            | 110                    | 112 | 116 |     |     |
| NiCr-6617 / 2.4627      | Ar+30%He                   |                            |                        | 552 | 556 |     |     |
| Co - Based              | Ar100%                     |                            |                        | 532 | 536 |     |     |

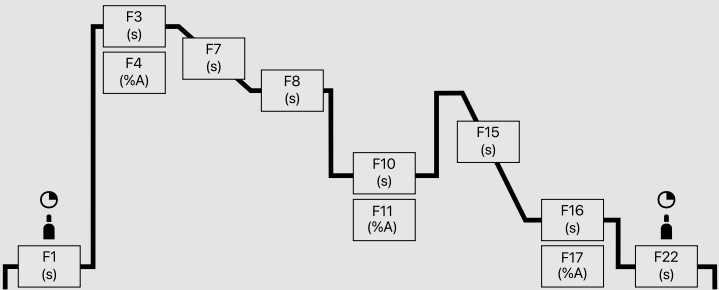

| Function | Description                    | Min  | Max  |
|----------|--------------------------------|------|------|
| F1       | Gas pre-flow (s)               | 0    | 10   |
| F2       | Start wire speed (m/min)       | 1.5  | 11   |
| F3       | Start time (s)                 | 0    | 10   |
| F4       | Start current (%)              | 1    | 200  |
| F5       | Start arc correction(V)        | -9.9 | +9.9 |
| F7       | Start slope (s)                | 0    | 5    |
| F8       | Duo peak time (s)              | 0.05 | 10   |
| F10      | Duo base time (s)              | 0.05 | 10   |
| F11      | Duo base amper (%)             | 1    | 100  |
| F12      | Duo base arc correction (v)    | -9.9 | +9.9 |
| F15      | End down slope (s)             | 0    | 10   |
| F16      | End time (s)                   | 0    | 10   |
| F17      | End current (%)                | 1    | 200  |
| F18      | End arc correction (V)         | -9.9 | +9.9 |
| F20      | End burn back (-)              | 0    | 15   |
| F21      | End wire cut mode (-)          | 0    | 2    |
| F22      | Gas post-flow (s)              | 0    | 10   |
| F23      | Smart trigger (-)              | 0    | 1    |
| F24      | Penetration stabilizer (m/min) | 0    | 10   |


| Function | Description                      | Min | Max |
|----------|----------------------------------|-----|-----|
| F25      | Hot start time (s)               | 0   | 10  |
| F26      | Hot start current (%)            | 1   | 200 |
| F27      | Arc force (-)                    | -50 | +50 |
| F28      | Antistick (s)                    | 0   | 2   |
| F29      | VRD function (-)                 | 0   | 1   |
| F34      | Tack/stich mode (-)              | 0   | 2   |
| F35      | Cooling mode (-)                 | 0   | 4   |
| F36      | Motor current (A)                | 0   | -   |
| F37      | Motor current limit (A)          | 0.7 | 7   |
| F38      | Auto load default values (-)     | 0   | 1   |
| F39      | Motor control firmware (-)       | -   | -   |
| F40      | Power control firmware (-)       | -   | -   |
| F41      | Arc on time (h)                  | 0   | -   |
| F42      | Machine on time (h)              | 0   | -   |
| F45      | Wire speed correction (m/min)    | -2  | +2  |
| F48      | Status light template            | 0   | 4   |
| F49      | Working mode                     | 0   | 9   |
| F50      | RL cable calibration (mOhm)      | 0   | 30  |
| F31      | TIG V stop limit (V)             | -   | -   |
| F32      | TIG comfort stop sensitivity (V) | -2  | +2  |

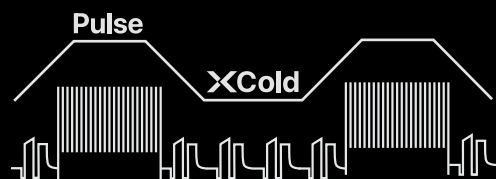


**Position**




**4x4 Rollers  
Wire Drive**

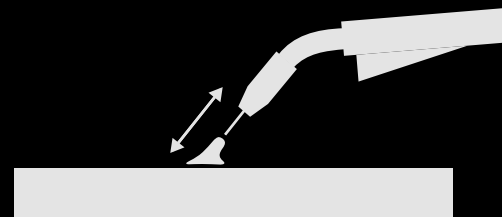


**XCStabil**

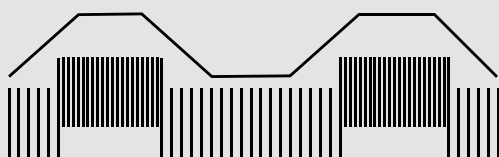


**Duo Pulse**

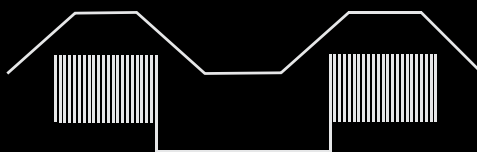


**Twin**

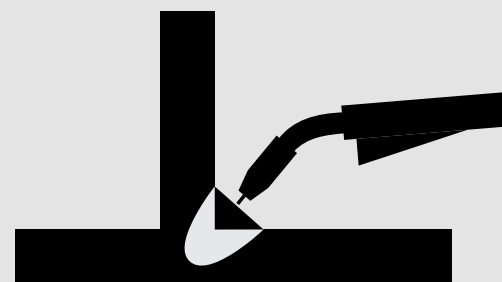


**XCDeep**

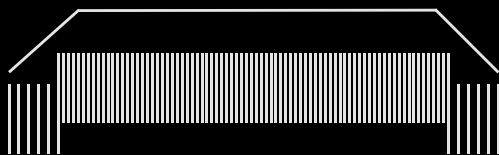

**Pulse**

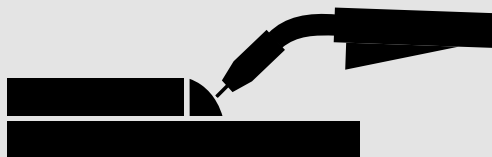


**XC Cold**

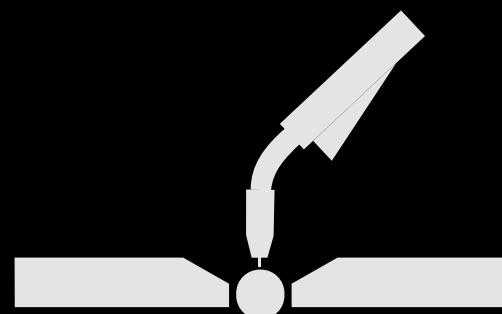

**XCRoot**



**25.000 PPS**  
**Wire Speed Control**  
**Perfect Feedability**

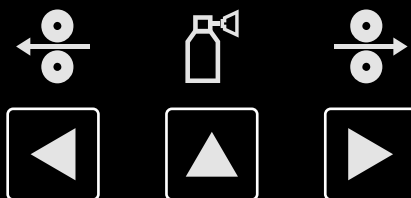

**Wire Push**  
**Pull-Back**  
**Gas Testing**



**Spool Cover**  
**With Wire**  
**View**

**99**

**Program**  
**Memory**



**Intelligent**  
**Cooling**

**RL**

**Torch and Cable**  
**Calibration**



**Hose Pack**  
**Support**



**Torch**



**Military**  
**Connector**

**IP23 Design**

**Compact Wire Feeder**

**Industrial Wheels**

**Wire Feeder Wheels\***

**Ergonomic Robust Modular Design**

**Aluminum Gun Holder**

**Spatter Free Ignition**

**Wire Cut Function for Perfect Ignition**

**Wire Feeding Unit with LED Lighting**

**MMA Connection on Wire Feeder**

**Gas Saving System**

**Gas Filter**

**Coolant Liquid Filter**


**Extension Cable Holder**

**External Changable Couplings**

**Double Setscrew Plugs**

**Brass-Nut Sockets**

\* Optional

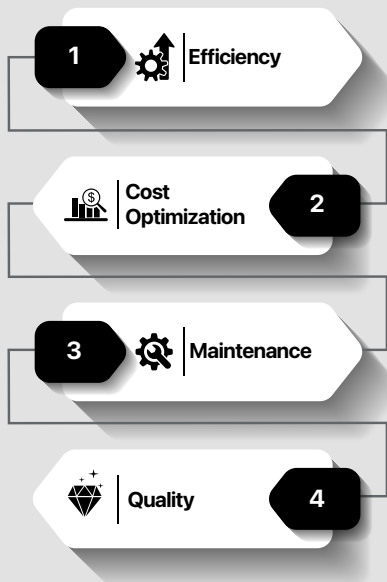


**KOLARC**  
.CLOUD


WiFi Bluetooth

LoRaWAN N

Ethernet  
USB Type-C

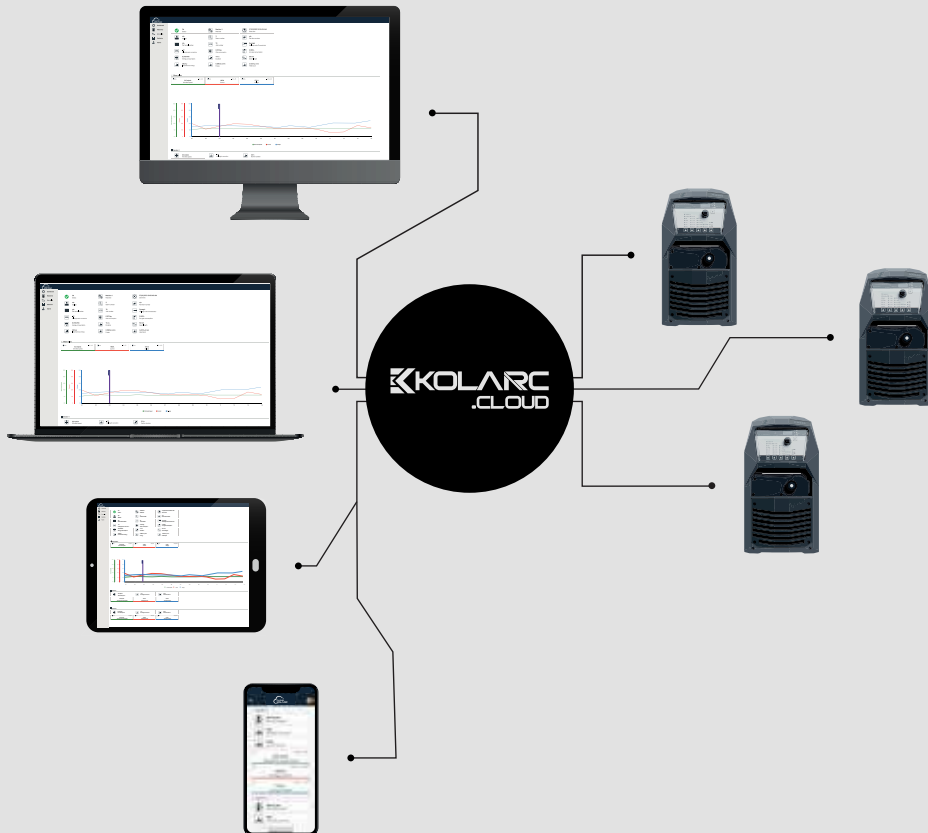

**KOLARC**

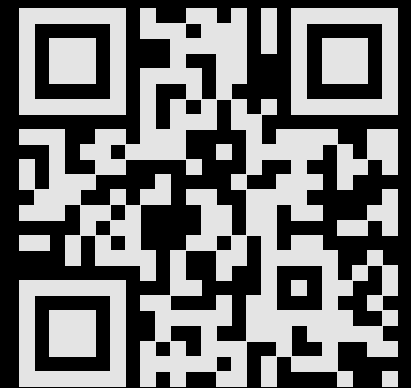

[www.kolarc.com](http://www.kolarc.com)